



20L ECO III

Material	HM-HDPE
O/All Dimensions	392 x 295 x 240mm
UN Approved	UN Group II
UN Number	TBC
Weight	800g +/- 26g
Min. Wall Thickness	0.70mm
Brimful Capacity	22,000ml +/- 50
Closures	60mm TE, 60mm Vented
Closing Torque	12-20nm
Decoration Label Area	2 panels of
	(h) 210mm x (w) 195mm
Decoration Sleeve Area	210mm x 953mm

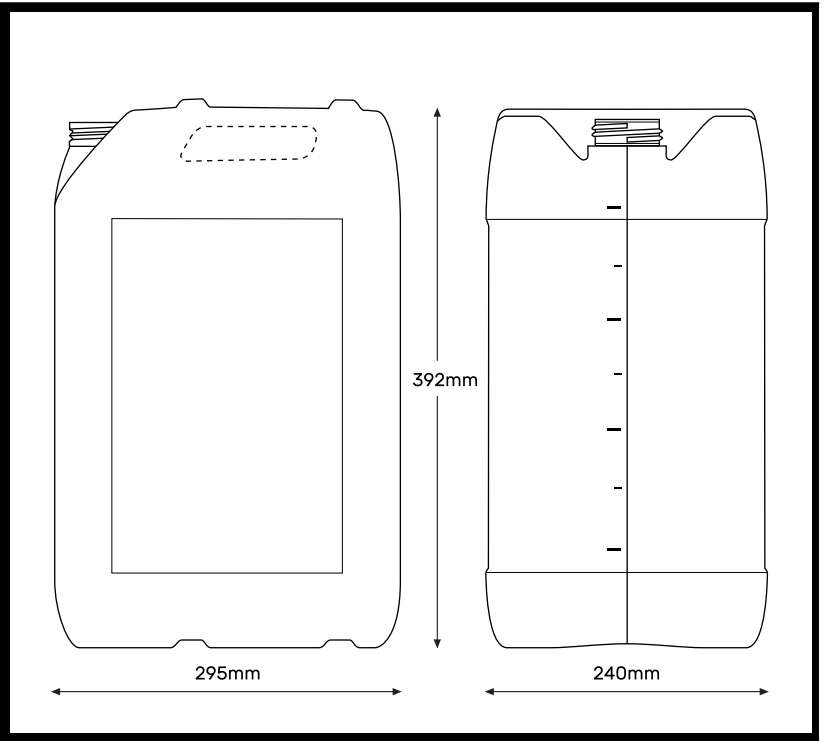


NECK DETAILS

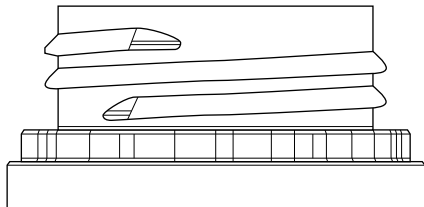

Neck Height	27.2mm +/- 0.5mm
Thread OD	59.5mm +/- 0.30
Neck ID	49mm +/- 0.30

PACKING CONFIGURATION

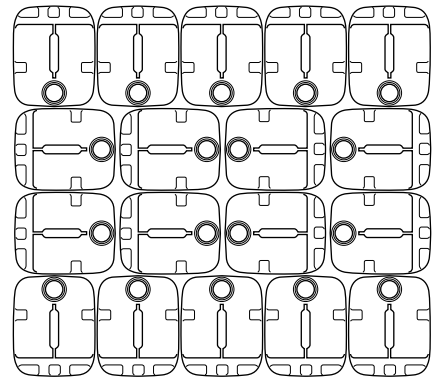

Pack Type	Palletised & Heat Sealed
Pallet size	1000mm x 1200mm x 1302mm high single stack
	2427mm high double stack
Units Per Pallet	18 per layer (3 high), 54 per single pack
	108 per double pack (6 high)
Units per Full Load	2,754 with closures
	2,808 without closures

This data sheet is for reference only. Full specification can be provided on request. Values indicated may vary within permitted tolerances.
 Suitability for purpose is subject to user verification.